

DURABLE, LIGHTWEIGHT, AND EASY TO OPERATE



D91P Hand-held Omnidirectional Dynamic Microphone

- **AIDS ARTICULATION AND INTELLIGIBILITY IN TRANSMISSION OF VOICE FREQUENCIES**
- **ENCASED IN AN IMPACT-RESISTANT PLASTIC HOUSING FOR MAXIMUM PROTECTION**
- **NICKEL-PLATED STEEL CLIP-TYPE MOUNTING BRACKET IS INCLUDED**
- **ENHANCES COMPUTER FLEXIBILITY**

APPLICATIONS

- **Hotels**
- **Airports**
- **Convention Facilities**
- **Aircraft**
- **CB Applications**

SPECIFICATIONS FOR THE D91P HAND-HELD OMNIDIRECTIONAL DYNAMIC MICROPHONE

Type:	Hand-held, close-talking, omnidirectional dynamic microphone	Weight:	4.5 oz. (127.6 gm), less cable
Frequency Response:	180-10,000 Hz	Case:	Impact-resistant plastic, charcoal gray
Output Level:	-60 dBm at 1 Pa	Cable:	5½' extended, 10"-12" retracted 4-conductor (2 shielded, 2 unshielded) coil cord with neoprene jacket
Impedance:	150/250Ω	Mounting Facility:	Nickel-plated, spring steel, clip-type mounting bracket with two No. 6 sheet-metal screws 5/16" long
Pickup Pattern:	Omnidirectional	Operating Temperature Range:	Up to 180°F
Connections— Microphone: Relay Control Circuit:	2 shielded conductors 2 unshielded conductors		
Dimensions:	2½" (6.4 cm) W 3⅝" (9.2 cm) L 2" (5.1 cm) H		

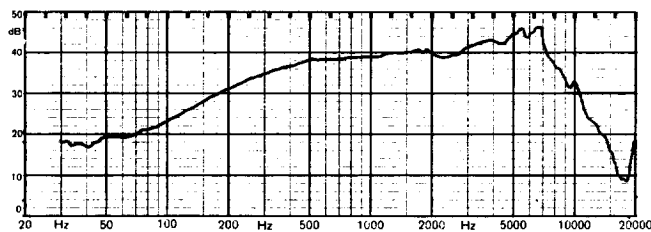


FIGURE 1. FREQUENCY RESPONSE

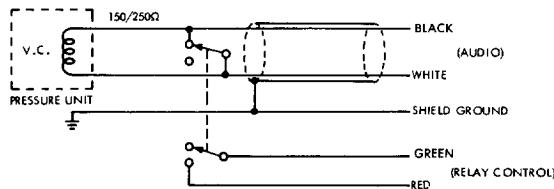


FIGURE 2. D91P MICROPHONE WIRING DIAGRAM




FIGURE 3. D91P MOUNTING DETAIL
PART NO. 14-08-014539

ARCHITECT'S AND ENGINEER'S SPECIFICATIONS

The omnidirectional dynamic microphone shall be the hand-held, close-talking type with a push-to-talk switch that shall enable simultaneous operation of relays, visual indicators, etc., with the muting of the audio circuit by means of an extra set of prewired contacts. The microphone shall be encased in an impact resistant housing with all internal components shock mounted for protection.

*10 dynes/cm² = 1 Pascal = 10 Microbars

The microphone shall meet the following criteria: Frequency response from 100-5000 Hz. Sensitivity, -60 dBm/1 Pa. Impedance, 150/250Ω. Connections, 2 shielded conductors for audio circuit, 2 unshielded conductors for relay control circuit.

The microphone shall be the ALTEC LANSING Model D91P.



a MARK IV company

P. O. BOX 26105 • OKLAHOMA CITY, OK • 73126-0105 U.S.A. • 405/324-5311 OR FAX: 405/324-8981

©1990 ALTEC LANSING CORPORATION