




816VI Horn Loaded Low Frequency System

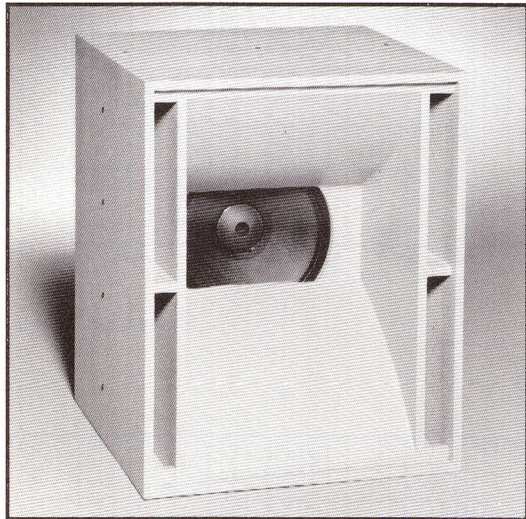

KEY FEATURES

- ★ **Vented Bass Horn**
- ★ **Superior Low-Frequency Directivity Control**
- ★ **High Output Capability**

The Altec Lansing **816VI** low-frequency loudspeaker system is a factory assembled vented bass horn system. This compact system features high sensitivity and high output with excellent directivity control down to 200 Hz. The nominal coverage at 500Hz is 80° horizontal by 60° vertical. The bass reflex porting extends the low frequency response to below 65 Hz, or lower if multiple units are used. The **816VI** consists of a 16-inch (40.6 cm) high power low frequency driver and an input terminal plate. Electrical connection to the driver is made by large screw terminals able to accept up to ten gauge wire. The system can be used with an electronic crossover or a standard Altec Lansing passive network installed in place of the input plate. The maximum intended crossover frequency is 2 kHz. The enclosure is constructed from 3/4 inch (1.9 cm) thick thoroughly braced 7-ply birch plywood lined with sound absorbent

PRIMARY SPECIFICATIONS

System Type: Vented bass horn type low-frequency loudspeaker system.

Pressure sensitivity: 103.5 dB SPL (1W, 100Hz - 1kHz, re: 20uPa, see note 1).

Frequency Response: 65 Hz - 3 kHz (see Figure 1, Note 2)

Power Handling: 200 watts, 50Hz - 4 kHz, AES method (see note 3).
400 watts, 50Hz - 4 kHz continuous program.
800 watts, 50 Hz - 4 kHz peak power.

Maximum Long Term Output: 126.0 dB SPL (200 watts input, 1m, re: 20uPa, see note 4).

Impedance: 7.0 ohms minimum.
8.0 ohms nominal.

















DESCRIPTION

glass wool. Threaded insert mounting points are provided to conveniently attach the Altec Lansing **816VI-SK** suspension kit. The system may then be hung as a single unit or as part of a cluster. The finish of the enclosure is texture painted Acousta-beige but it can be painted to complement any interior. The grille is covered with beige cloth and fastened to the front of the enclosure with six wood screws.

The **816VI** can be used with essentially all of the Altec Lansing MR-series and VIR, VIT horns to create a compact, high output and directivity controlled system for use in houses of worship, auditoriums, hotels and civic centers.

816VI Specifications (continued)

Components:	515 - GHP type 16-inch, high efficiency, low frequency driver.	Dimensions:	31.5in (80.0cm) high 25.3in (64.3cm) wide 25.5in (64.8cm) deep
Input Terminals:	Large screw terminals	Net Weight:	110.0 lbs (50.0 kg)
Replacement L.F.:	R515-8GHP	Shipping Weight:	118.0 lbs (53.6 kg)
Replacement Grille:	Model RG816VI	Finish:	Acousta-beige, texture finish, polyurethane paint, beige grille cloth.
Enclosure:	Vented bass horn type, built of 3/4 - inch (1.9cm) birch plywood with appropriate bracing, lined with glass wool. Includes mounting points for accessory 816VI-SK suspension kit.	Accessories:	Altec Lansing 816VI-SK suspension kit, N1285-8B passive network.



HORIZONTAL ———
VERTICAL - - - - -

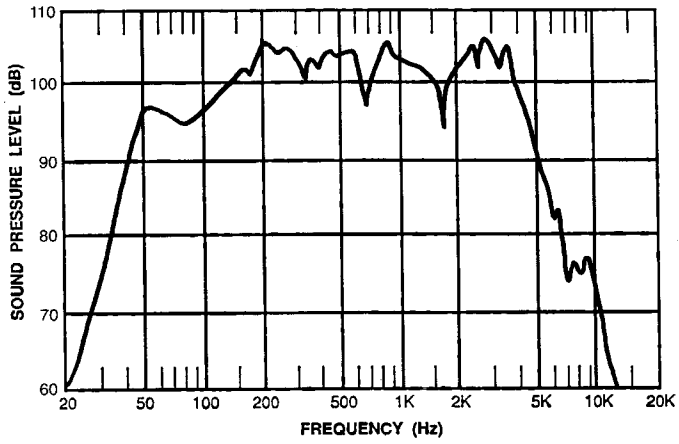


Figure 2. Frequency Response

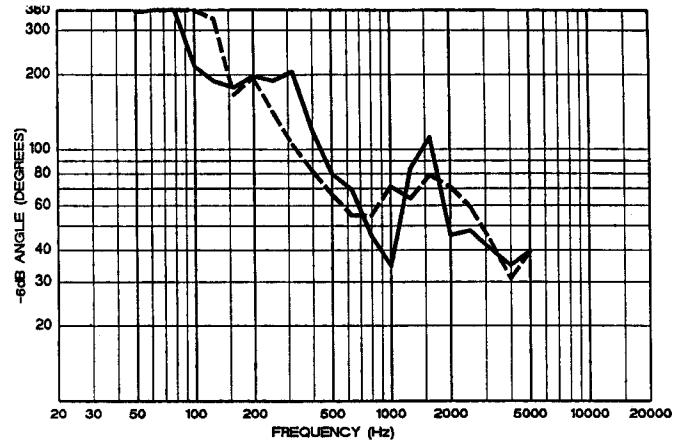


Figure 3. Dispersion Angle

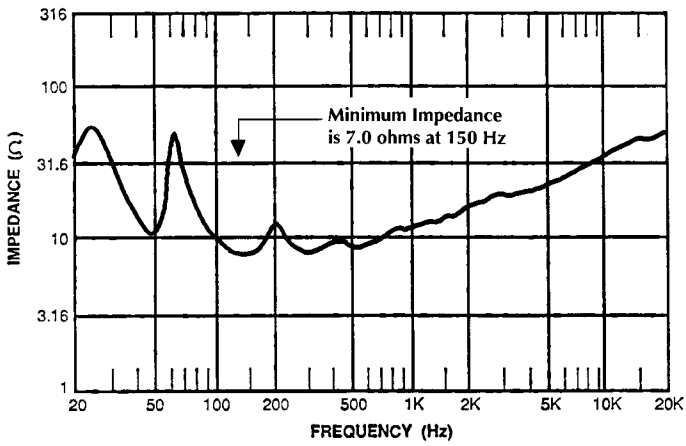


Figure 4. Magnitude of Impedance

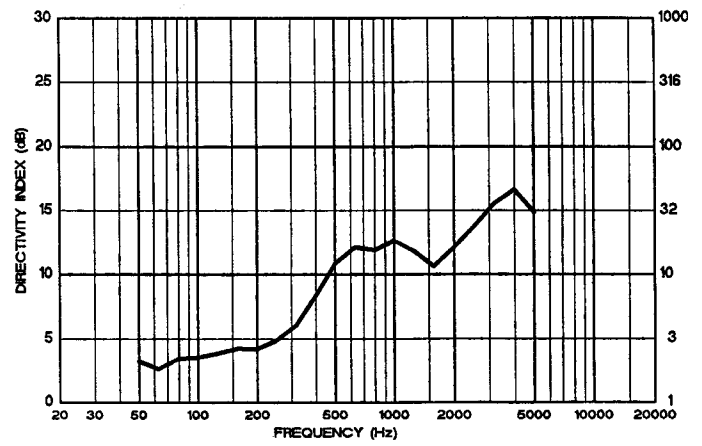


Figure 5. Q and Directivity Index

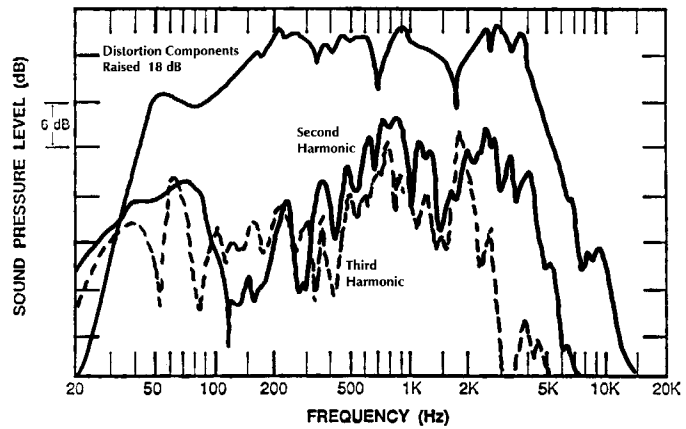


Figure 6. Harmonic Distortion at 0.01 Rated Power


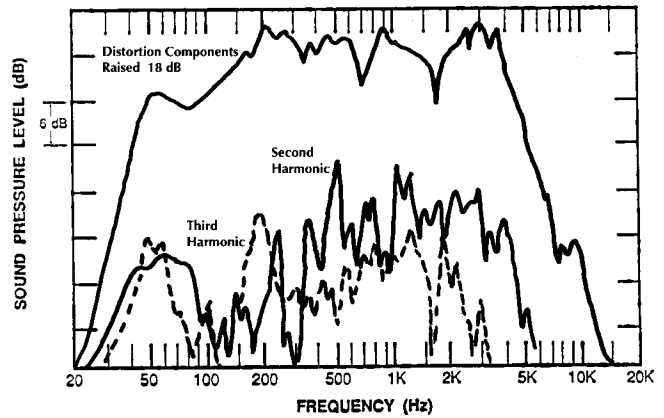


Figure 7. Harmonic Distortion at 0.1 Rated Power

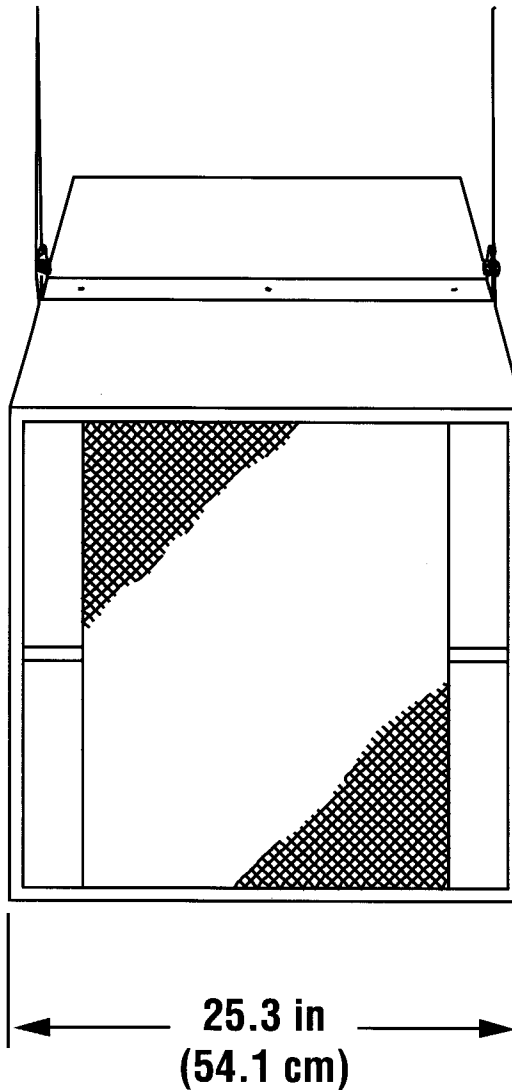


NOTES ON MEASUREMENT CONDITIONS

1. Pink noise signal, one Watt calculated using E^2/Z_{min} , 3.16 meter measurement distance referred to one meter.
2. On-axis, one Watt calculated using E^2/Z_{min} , 3.16 meter measurement distance referred to one meter, low frequencies corrected for anechoic chamber error.
3. This system rating patterned after the A.E.S method for individual driver, where the test signal is pink noise with a 6dB crest factor over the bandwidth of the system, with power calculated using the E^2/Z_{min} , for two hours.
4. This measurement made under the same conditions as Pressure Sensitivity, but at rated power, and takes into account any power compression effects due to non-linearities in the system.
5. Distortion components invalid above 10kHz. The distortion at any given frequency may be found by graphically taking the difference between the fundamental and harmonic, and adding the number of Decibels which the harmonic has been raised on the graph and apply the formula:

$$\text{percent distortion} = 100 \times 10^{(\text{difference in dB} / 20)}$$

816VI
Center Of Gravity
A: 10.3 in (26.0 cm)
B: 15.8 in (40.0 cm)

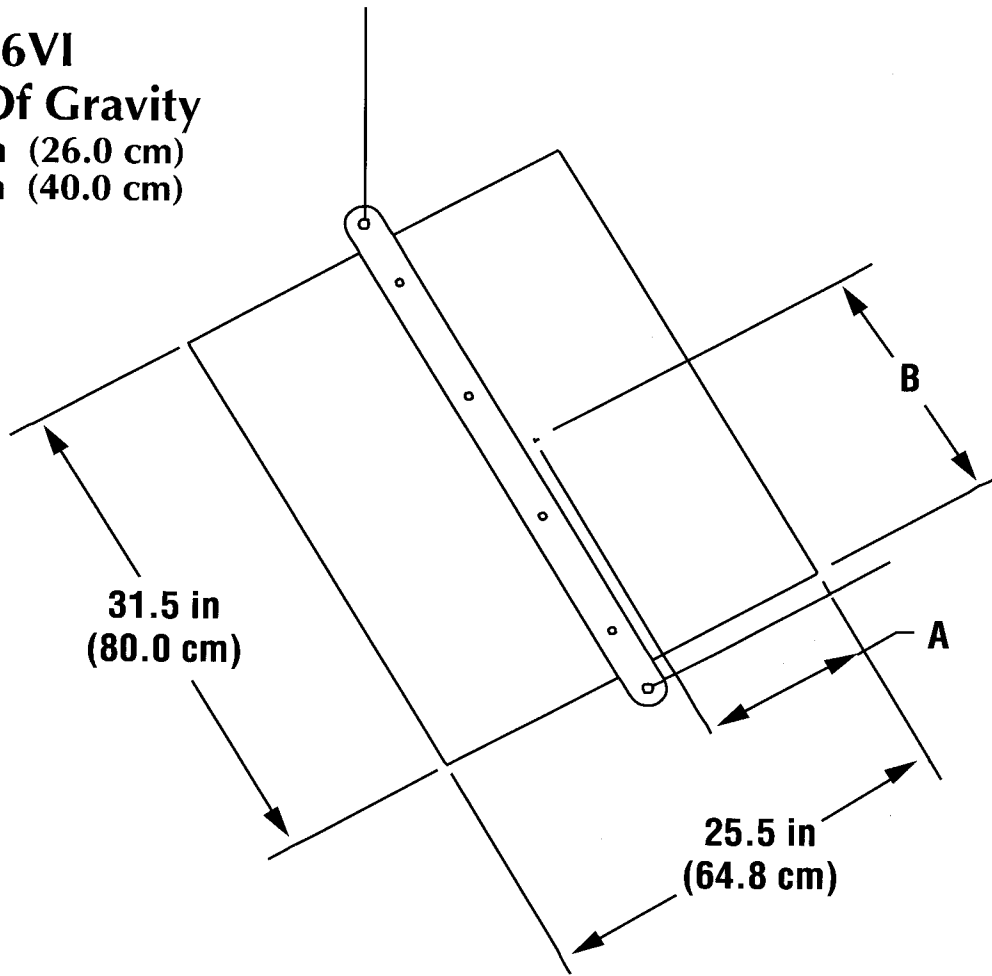

ARCHITECT'S AND ENGINEER'S SPECIFICATIONS

The loudspeaker system shall be of the vented bass horn type consisting of one 16-inch (40.6 cm) high power low frequency driver mounted in a vented bass horn enclosure. The loudspeaker shall meet the following performance criteria. Power handling, 200 watts of pink noise with 6 dB crest factor, band limited from 65 Hz - 3 kHz. Frequency response, smooth and uniformly usable at high levels from 65 Hz - 3 kHz. Pressure sensitivity, 103.5 dB at one watt, 65 Hz - 3 kHz, at one meter on axis. Impedance, 7 ohms minimum. The horn directivity pattern

shall be 80° horizontally by 60° vertically at 500 Hz. The enclosure shall be constructed of 3/4-inch 7-ply birch plywood and shall be heavily braced and lined with sound absorbent glass wool. The finish of the enclosure shall be a texture painted Acousta-beige and a removable grille shall be provided. The dimensions of the enclosure shall be 31.5-inches (80 cm) high by 25.3-inches (64.3cm) wide by 25.5-inches (64.8 cm) deep. The loudspeaker system shall weigh 110.0 lbs. (50.0 Kg). The loudspeaker system shall be the Altec Lansing **816VI**.



a MARK IV company

P.O. BOX 26105 ● OKLAHOMA CITY, OK 73126-0105 ● U.S.A. ● (405) 324-5311 or FAX: (405) 324-8981
 © 1992 ALTEC LANSING CORPORATION